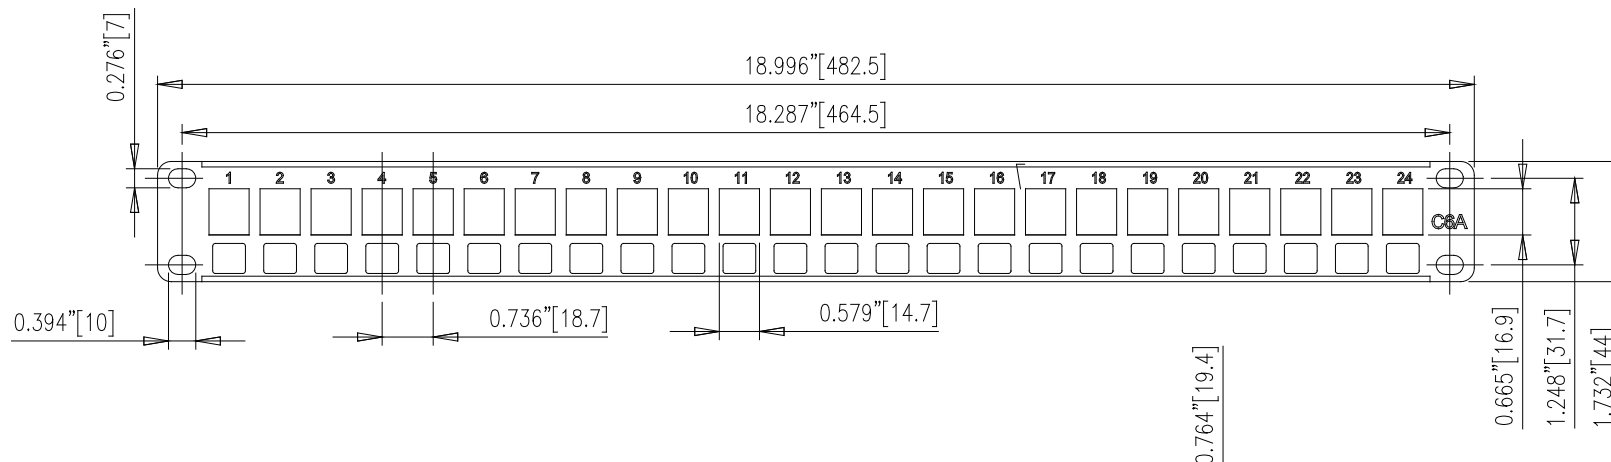
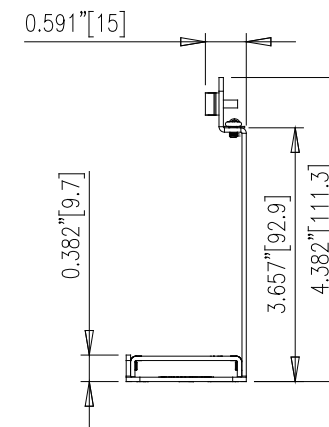
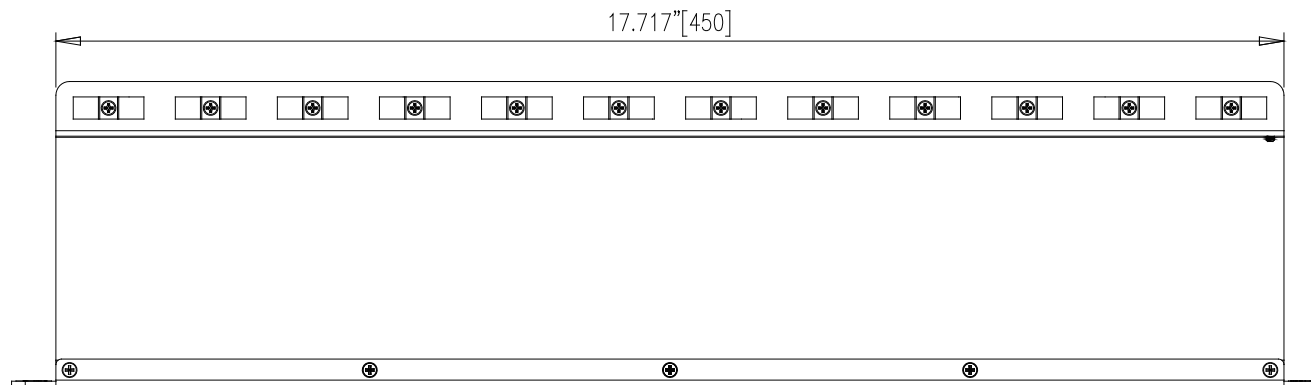


MATERIAL

Panel: SPCC, black powder coating finish, t=0.063 in=1.6 mm=15 ga

Rear Panel: SPCC, nickel plated, t=0.063 in=1.6 mm=15 ga

RoHS compliant

WIRE RANGE

Conductor Diameters: 0.020 in (0.51 mm) 24 AWG - 0.025 in (0.64 mm)

22 AWG

Insulation Diameters: 0.032 in (0.8 mm) - 0.039 in (1.0 mm)

Cable Diameters: 0.197 in (5 mm) - 0.354 in (9 mm)



LISTED
41VN
E191644

UL 1863
COMMUNICATIONS-CIRCUIT
ACCESSORIES

DRAWN BY Autumn Lee					Another quality product from BLACK BOX 726-746-5508 • www.blackbox.com		
APPROVED BY Jerry Su					TITLE Category 6a Patch Panel Frame 24 Port - Shielded		
DIMENSIONS ARE [IN (MM)] TOLERANCES:					PARTS NO. JPMT700A		
~0.8"	~2"	~6"	6"~	ANGLE	REV. 1		
±0.007"	±0.015"	±0.02"	±0.06"	2"	DATE 2010/12/08		
3rd Angle Projection				SCALE X		SHEET 1/1	